

**DS-D5032F3-1V0S(海外标配)(美标)**  
**32 inch FHD 75Hz VA Monitor with Speaker**



- VA technology , 178° ultra-wide view screen.
- 8 bit LVDS FHD (1920 × 1080) display.
- 3D noise reduction.
- Low blue light design for eye care.
- Dual interface of HDMI and VGA.
- Support VESA wall mount.

## ▪ Specification

| Display                        |                                                                                                                                                                                                |
|--------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Screen Size                    | 32 inch                                                                                                                                                                                        |
| Active Display Area            | 698.4 (H) mm × 392.85 (V) mm                                                                                                                                                                   |
| Resolution                     | 1920 × 1080                                                                                                                                                                                    |
| Backlight                      | D-LED                                                                                                                                                                                          |
| Pixel Pitch                    | 0.12125 (H)mm x 0.36375 (V) mm                                                                                                                                                                 |
| Brightness                     | 300 cd/m <sup>2</sup>                                                                                                                                                                          |
| Viewing Angle                  | 178° (H) / 178° (V)                                                                                                                                                                            |
| Color Depth                    | 8 bit                                                                                                                                                                                          |
| Contrast Ratio                 | 4000 : 1                                                                                                                                                                                       |
| Response Time                  | 8 ms                                                                                                                                                                                           |
| Refresh Rate                   | Typ. 60 Hz , Max. 75 Hz                                                                                                                                                                        |
| Haze                           | Haze 2 %                                                                                                                                                                                       |
| Reliability                    | 7 × 24 H                                                                                                                                                                                       |
| Color Gamut                    | 72 % NTSC                                                                                                                                                                                      |
| Interface                      |                                                                                                                                                                                                |
| Video & Audio Input            | VGA × 1 , HDMI 1.4 × 1 , Audio Output × 1                                                                                                                                                      |
| Video & Audio Output           | Speaker(8Ω 10W) × 2                                                                                                                                                                            |
| Data Transmission Interface    | None                                                                                                                                                                                           |
| Control Interface              | None                                                                                                                                                                                           |
| Power                          |                                                                                                                                                                                                |
| Power Supply                   | 100~240 VAC, 50/60 Hz                                                                                                                                                                          |
| Power Consumption              | ≤ 48 W                                                                                                                                                                                         |
| Standby Consumption            | ≤ 0.5 W                                                                                                                                                                                        |
| Working Environment            |                                                                                                                                                                                                |
| Working Temperature            | 0°C to 40 °C (32 °F to 104 °F)                                                                                                                                                                 |
| Working Humidity               | 20% to 90% RH (Non-Condensing)                                                                                                                                                                 |
| Storage Temperature            | -20 °C to 60 °C (-4 °F to 140 °F)                                                                                                                                                              |
| Storage Humidity               | 10% to 90% RH (Non-Condensing)                                                                                                                                                                 |
| General                        |                                                                                                                                                                                                |
| Casing Material                | Plastic                                                                                                                                                                                        |
| VESA                           | 100 mm × 100 mm (4 - M6 × 10 mm)                                                                                                                                                               |
| Bezel Width                    | 16.7 mm (top/left/right), 20.5 mm (bottom)                                                                                                                                                     |
| Product Dimensions (W × H × D) | With base: 735.08 (W) mm × 489.16 (H) mm × 207.95 (D) mm<br>Without base: 735.08 (W) mm × 433.46 (H) mm × 80.19 (D) mm                                                                         |
| Package Dimensions (W × H × D) | 808 (W) mm × 510 (H) mm × 140 (D) mm                                                                                                                                                           |
| Net Weight                     | 4.55 ± 0.5 kg                                                                                                                                                                                  |
| Gross Weight                   | 6.1 kg ± 0.5 kg                                                                                                                                                                                |
| Packing List                   | Monitor × 1, Base component × 1, HDMI cable (1.5 m) × 1, User manual × 1,<br>Multilingual manual × 1 , remote control × 1 , Base screw × 6 , Wall-mount screw × 4                              |
| Remarks                        | The base is included by default.<br>The product appearance and parameters in this specification may vary from your actual device. Please consult our local sales staff for further information |

## Physical Interface




| Interface | Description              | Interface | Description                             |
|-----------|--------------------------|-----------|-----------------------------------------|
| POWER     | AC power input interface | HDMI      | HDMI 1.4 digital signal input interface |
| VGA       | VGA analog signal input  | AUDIO OUT | 3.5 mm Audio output interface           |

## Available Model

DS-D5032F3-1V0S(美标)

## Dimension

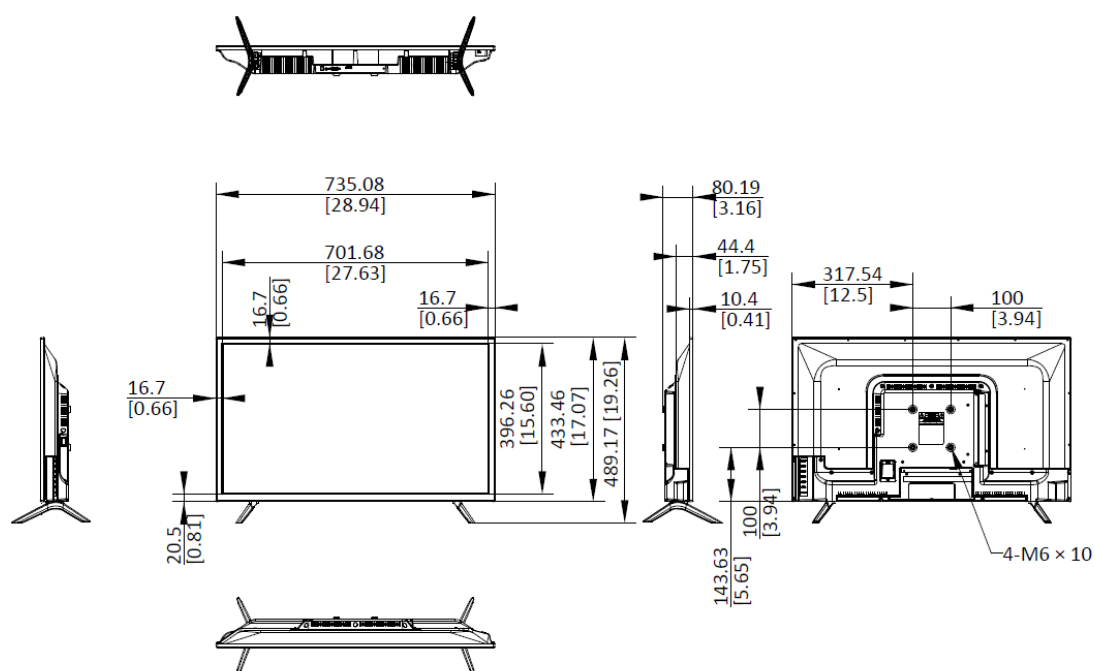

Unit: mm [inch]



# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

