


# VI 650-2200 SH/ SHL

- Human Interface Device (HID) Compatible USB Connection
- Data Line Surge Protected: RJ45/ RJ11
- Automatic Voltage Regulator
- Fast charging (for a Line-Interactive UPS)
- Available with an LCD Display with the SHL Model



Model  
dependent

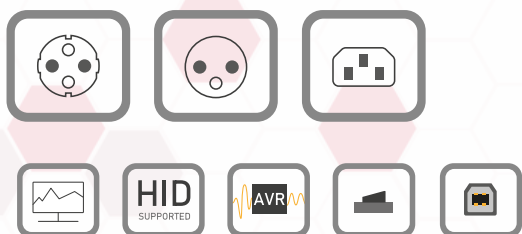

The PowerWalker VI SH / SHL provide a comprehensive protection and a high-power density in a small and economic package. It is equipped with a voltage stabilizer; this UPS will continue providing clean and stable power to connected equipment and is perfect for any home or small office application.

These series is equipped with a stronger charger that reaches 90% of the battery capacity in 2-4h. With a Human Interface Device (HID) support for USB communication it allows quick and easy setup with any operating system. In addition, this UPS provides RJ-11 surge protection.

Highlight of the PowerWalker VI SHL unit is the integrated LCD Display. Which lets you follow the usual UPS detailed information without the need of a second device to monitor the UPS.

General Features	Values			
Power Capacity	650VA/ 360W	850VA/ 480W	1200VA/ 600W	2200VA/ 1200W
Output Power Factor	0.55	0.56	0.50	0.55
LINE Mode Full Load	95.0%			
Input Specifications	Values			
Input Voltage Range	170-280 VAC +/-7%			
Frequency (Synchronized Range)	50Hz or 60Hz			
Input Type	CEE 7/7, IEC C14 or IEC C14 <sup>UK</sup>		IEC C14 or IEC C14 <sup>UK</sup>	
Output Specifications	Values			
Nominal Output Voltage	230 VAC			
Voltage Regulation	+/- 10%			
Frequency (Battery Mode)	+/- 1Hz			
Outlets	Type F or Type E (2)		Type F or Type E (2) + IEC C13 (2)	
	or IEC C13 (4)		or IEC C13 (6)	
Battery Specifications	Values			
Batteries	1 x 12V/ 7Ah	1 x 12V/ 9Ah	2 x 12V/ 7Ah	2 x 12V/ 9Ah
DC Voltage	1 x 12V		2 x 12V	
Recharge Time	4h to 90%			
Half Load Backup Time	6 min		11 min	5 min
Transfer Time [AC to Battery]	4-8 ms			