


MotionCam Outdoor

MotionCam Outdoor is a wireless motion detector for outdoor use with an in-built photo camera. Photos are taken only in case of motion alarm. MotionCam Outdoor provides users and security companies with fast and protected visual verification of alarms.


The Ajax hub is required for operation
Find the list of compatible hubs on the official website.

 ajax.systems/support/devices/motioncam-outdoor

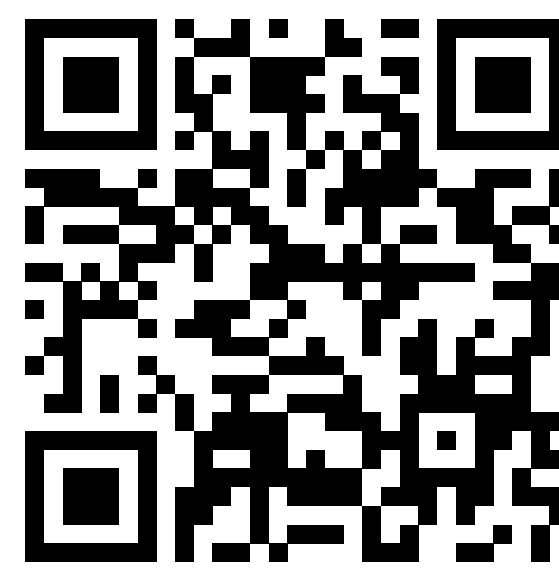

15m


Up to 15 m motion detection range




Night vision




Advanced pet immunity



Anti-masking system



Up to 3 years of operation from batteries




Communication with the hub at a distance of up to 1,700 m




Motion detected. Alarm raised. Evidence captured.

With MotionCam Outdoor, users know about the actual situation even before the burglars understand that they're busted. An animated series of photos made by a wide dynamic range camera follows the instant motion alarm for an accurate situation appraisal. Photos are transmitted via an encrypted proprietary radio protocol and displayed in the Ajax apps or third-party monitoring software.



First photo delivered under 9 seconds



HDR camera for clear photos






Photo resolution up to 640 × 352 pixels



IR backlight to make photos in the dark

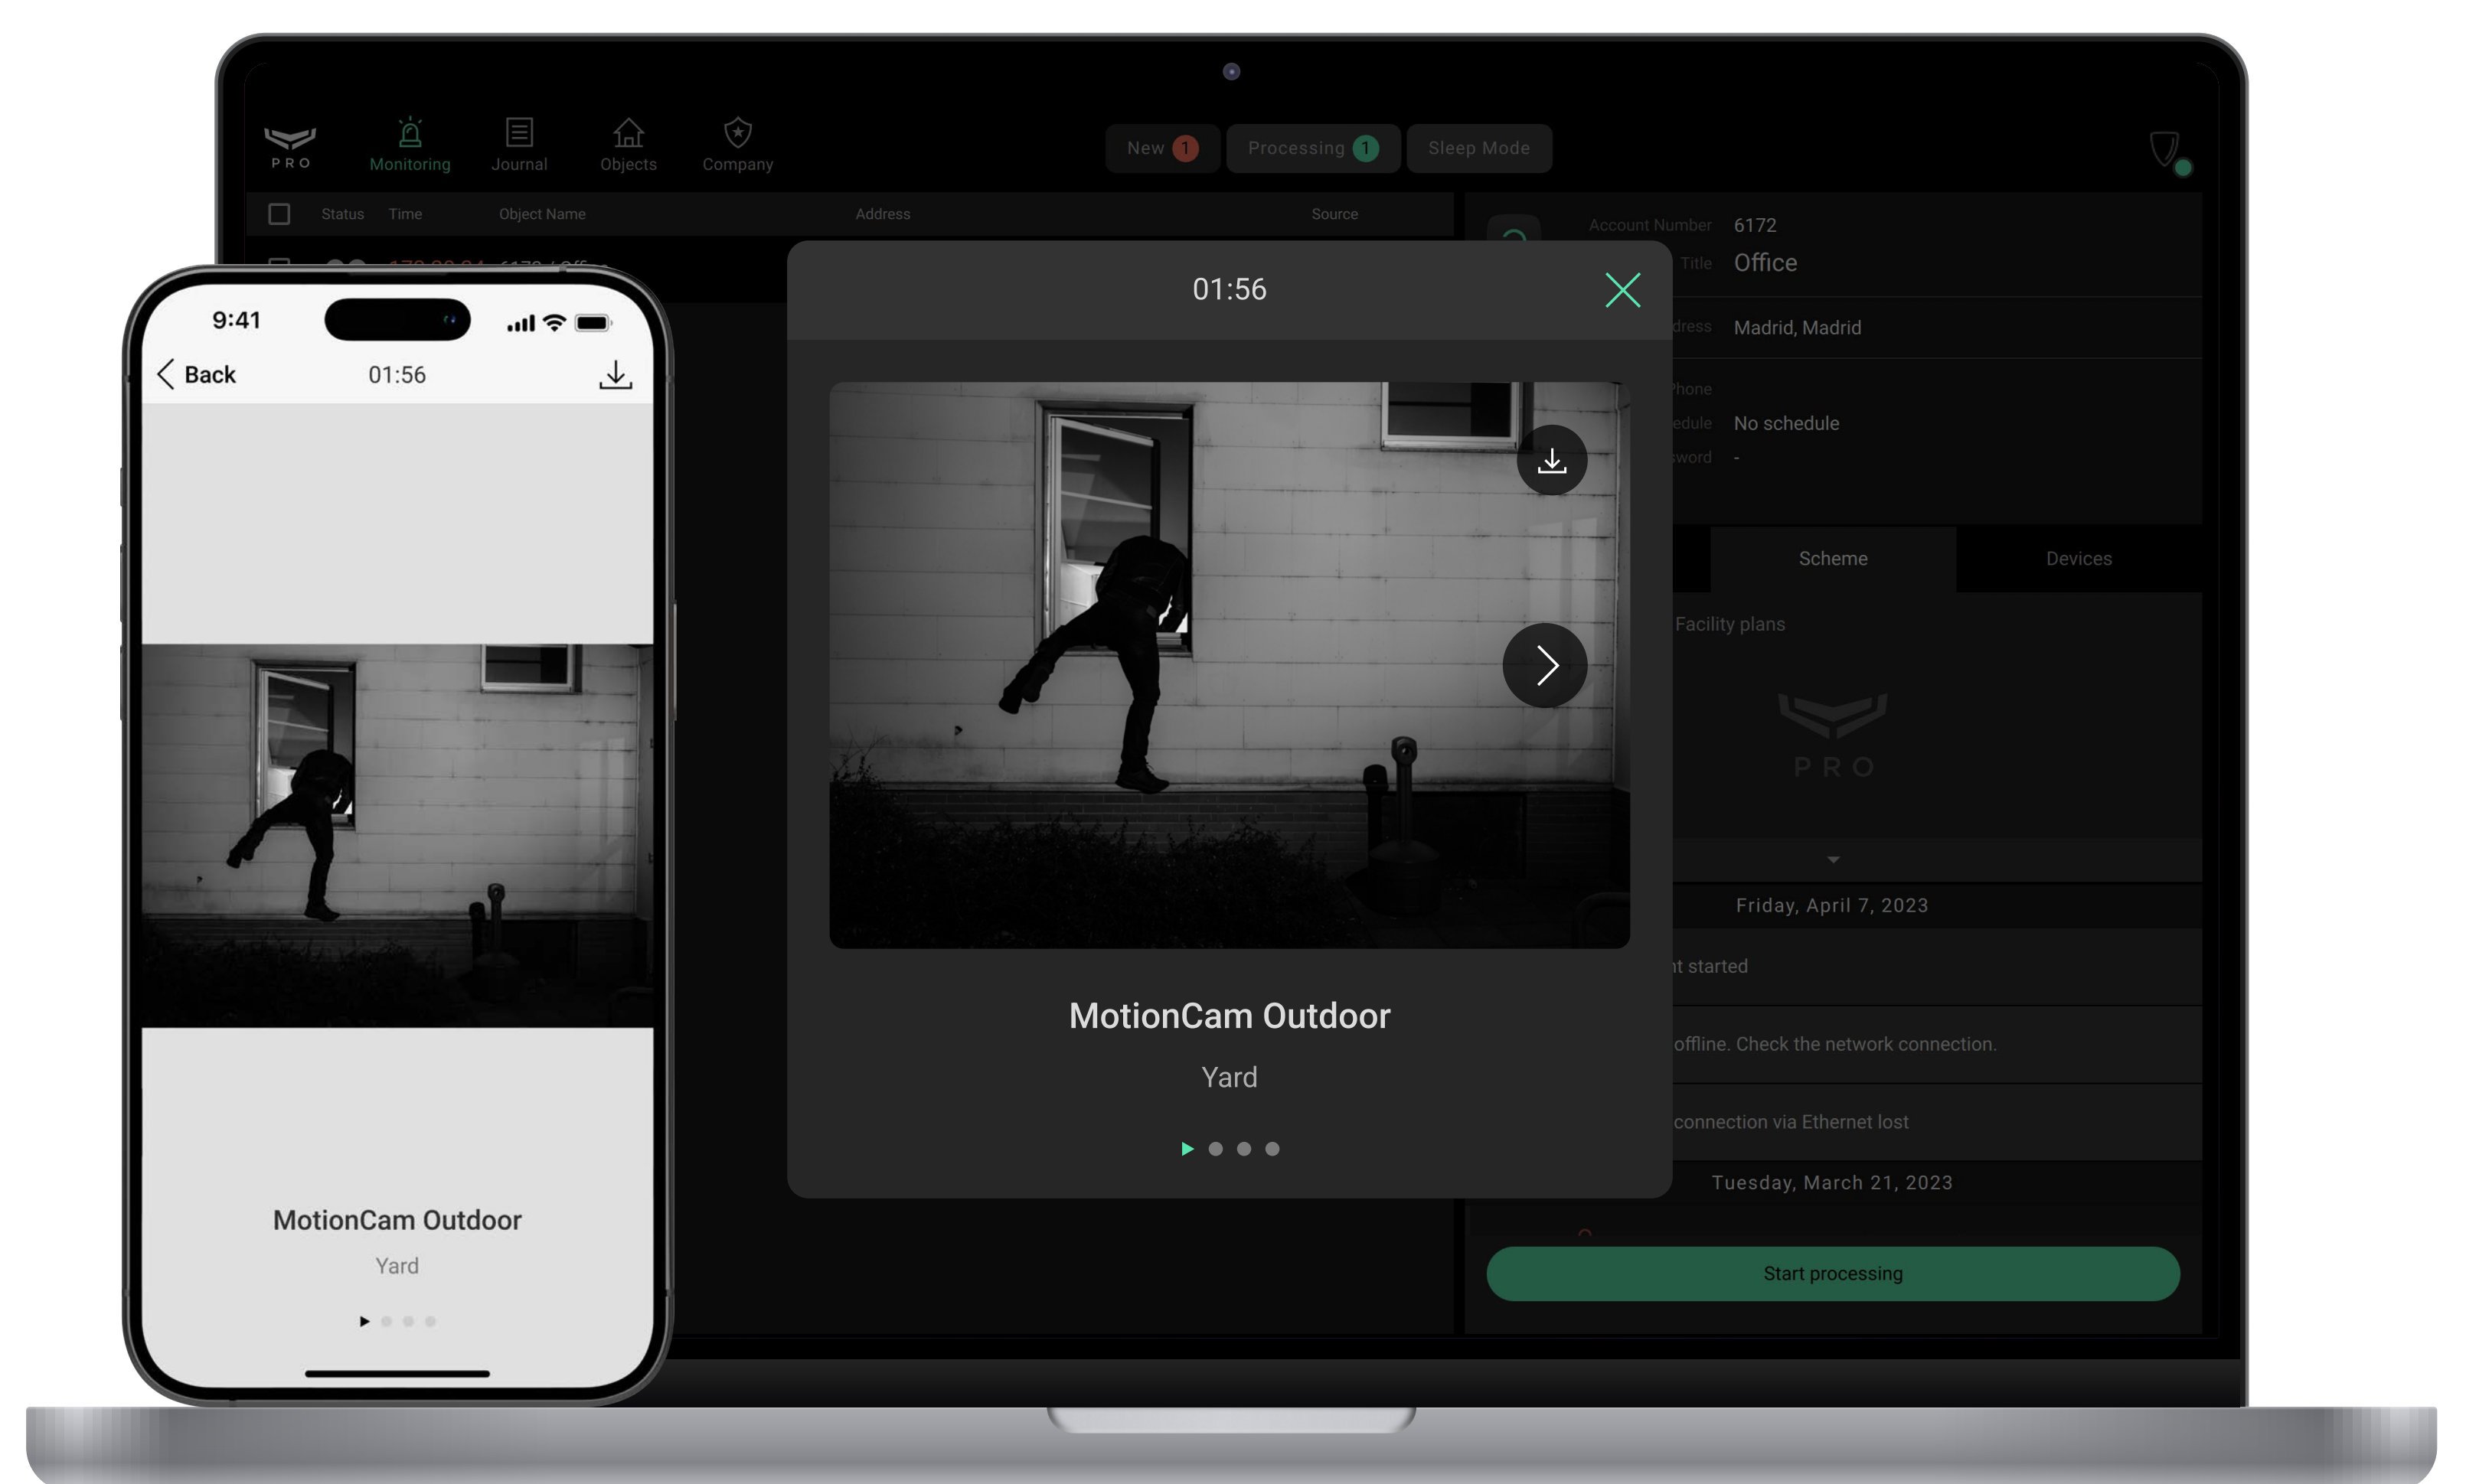

Monitoring software with integrated Ajax photo verification

See the full list by the link: ajax.systems/connecting-to-cms/

False alarm prevention

MotionCam Outdoor features a system of two independent PIR sensors that collect enough data to analyse the threat's reality with the LISA two-step software algorithm. LISA compares the frequency components of sensors signals — it is the know-how of the Ajax Systems that guarantee the detector accuracy.



Weatherproof design

MotionCam Outdoor is ready to operate in a wide range of climate zones. The detector is protected from dust and splashes and features a temperature compensation technology, making it effective in any weather conditions. The bundled hood protects masking sensors from rain and snow.





Hassle-free installation


To add a detector to the system, an installer scans the QR code with the Ajax app and assigns a name and a room. Configuring is done in the app in real-time using detection zone and signal strength tests. The detector can be disabled or its system parameters can be reconfigured remotely.



Antisabotage protection

The anti-masking system calibrates automatically when mounting the device onto SmartBracket. Then, if an obstacle appears in the field of view of anti-masking sensors or if they are painted, the detector notifies users and a security company. A tamper is immediately activated when the detector is dismantled from the bracket. The system needs less than a minute¹ to identify communication loss with the detector.

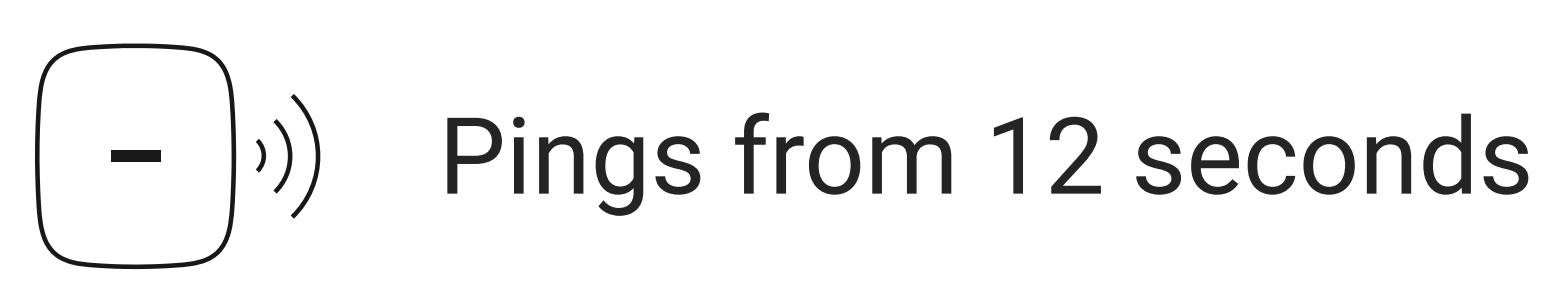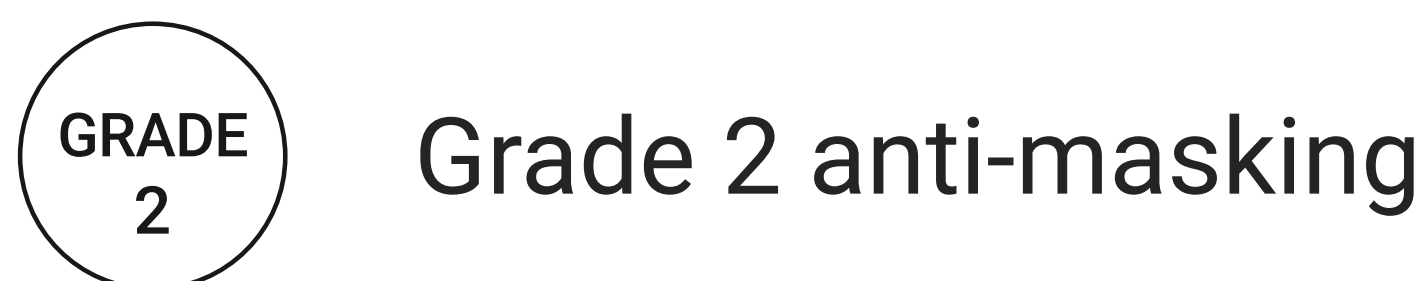

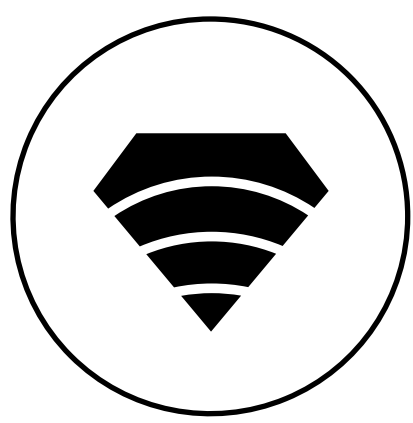

Jeweller

Guaranteed alarm delivery

We've developed the Jeweller radio protocol to ensure the uninterrupted operation of all system devices. The radio protocol uses time frames to synchronize communication of connected devices, authentication to eliminate forgery, and encryption to protect against hacking.



Wings

Secure photo transmission

We've developed Wings — an encrypted two-way radio protocol to securely deliver photos at a significant distance. It allows receiving visual alarm verification in a matter of seconds. Working in parallel with Jeweller, Wings does not interfere with it, providing stable data communication with a compatible hub at a distance of up to 1,700 meters.

Tech Specs

Compliance Grade 2 (EN 50131) PD 6662:2017 ² UL369, ULC S306	Radio communication range up to 1,700 m	Body protection IP56	Power supply 4 × CR123A
Frequency band 866.0 – 866.5 MHz 868.0 – 868.6 MHz 868.7 – 869.2 MHz 905.0 – 926.5 MHz 915.85 – 926.5 MHz 921.0 – 922.0 MHz Depends on the region of sales	Communication protocol Jeweller: two-way encrypted communication of event and alarms Wings: two-way encrypted communication of photo verifications	Photo camera Wide Dynamic Range up to 640 × 352 pixels resolution IR backlight	Battery life up to 3 years
Complete set MotionCam Outdoor SmartBracket mounting panel Hood 4 × CR123A (pre-installed) Installation kit Quick start guide	Installation outdoor/indoor at a height 0.8–1.3 m	Operation humidity up to 95%	Operating temperature range from –25°C to +60°C
Dimensions 206 × 108 × 93 mm	Weight 470 g	Color white	Fixing SmartBracket

¹ depends on the hub-detector ping settings
² when installed indoors